


**CATERING**

 REFRIGERATED CABINET  
**EASY - 700**

Model:

**PECC070DBXX**

Monoblock ventilated refrigeration unit sized for climate class 5 (tropicalization). Easily removed unit for quick and easy maintenance/replacement. Evaporator with cataphoretic coating, automatic defrost managed by digital controller. Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316. N.1 - reversible opening door, automatic closure and fixed opening at 100°. Easily removed, triple chamber magnetic seal. Rounded corners inside for easy and optimal cleaning. AISI 304 stainless steel guides and racks - Adjustable and removable.

**TECHNICAL DATA**

Temperature (°C)	(-22/-18)
Energy class	C
Annual energy consumption AEC (kWh/annum)	1646,20
Energy efficiency index EEI	42,35
Daily energy consumption E24 h (kWh)	4,51
Gross volume (L)	639
Net chilling volume (L)	-
Net freezing volume (L)	490
Climate class	5 (+40°C / 40% R.H.)
Refrigerant gas	R290
GWP	3
Refrigerant charge (kg)	0.090 kg
Defrosting	ELECTRIC
Condensate evaporation	Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316.
Condensation	AIR
Cooling output (W)	568
Voltage	AC230V 1N+T 50Hz
Special voltages (on request)	Optional
Absorbed power (W)	530
Current draw (A)	3,10
Noise (dB)	< 70

**CONSTRUCTION DATA**

Category	Upright - High performance
Intended use	Storage - This appliance is intended for use in ambient temperatures up to 40°C.
Internal material	AISI 304 Stainless Steel
External material	AISI 304 Stainless Steel (back, top and bottom in galvanized sheet metal)
Internal corners	Rounded corners inside for easy and optimal cleaning.
Insulation thickness (mm)	60
Insulation material	HFO Polyurethane (No CFC, no HCFC)
Door seal	Easily removed, triple chamber magnetic seal.
Door hinge	Standard left, reversible
Controller	Capacitive touch screen
Alarm	Visual and audible
NTC temperature probe	Standard
Floor support	Adjustable legs in AISI 304 stainless steel
Floor support height (mm)	Legs: 100-150 Castors: 110 - Ø 80 Plinth: 20


**SEDE OPERATIVA / PLACE OF BUSINESS**

 Via Fabio Filzi, 46 - 31036 Istrana (TV) - Italy  
 +39 0422 832679 / info@dal-mec.it

**SEDE LEGALE / REGISTERED OFFICE**

 Dal Santo Srl - Via Sant'Anna, 38 - 31050 Fossalunga di Vedelago (TV) - Italy  
 Partita IVA / VAT number 04207260268


**PECC070DBXX**

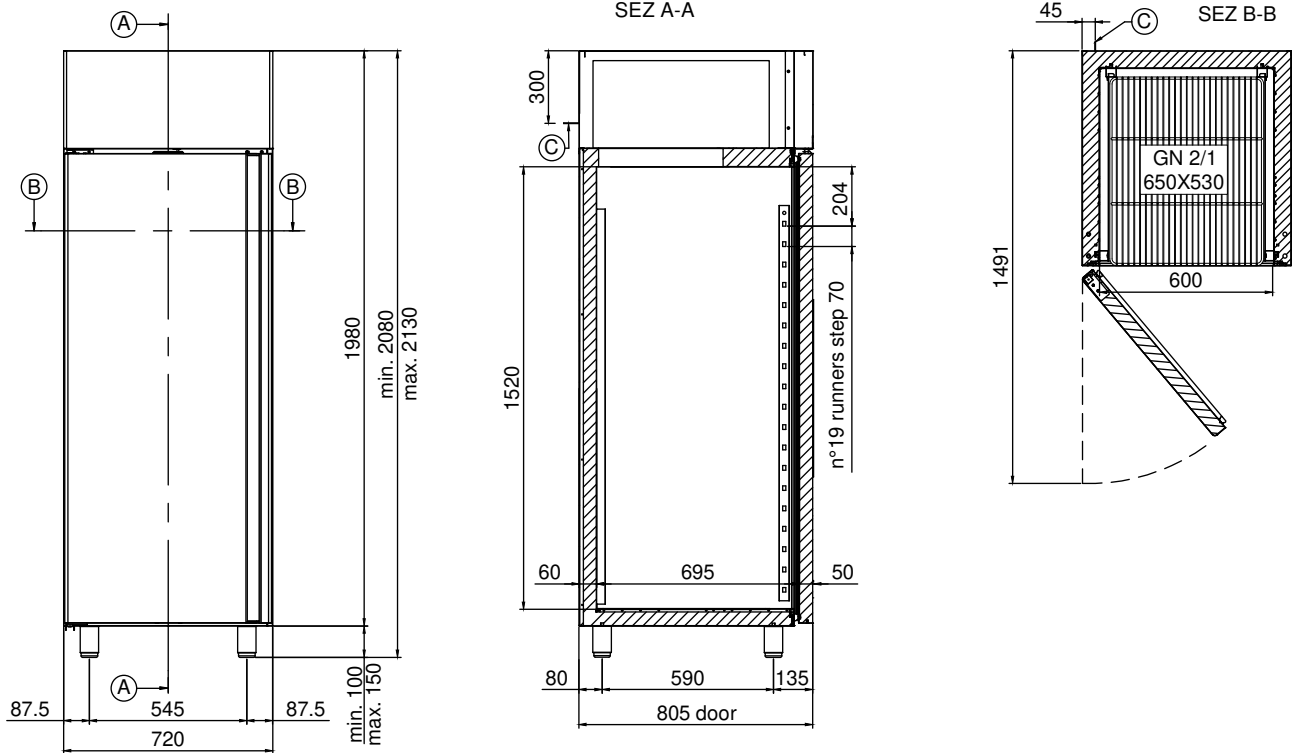

- A. Viewing plane
- B. Viewing plane
- C. Power cable outlet (length 2 m)

**WARNING!** While installing, have a qualified electrician connect it to an electrical panel.

**Minimum clearances**  
**WARNING!** The distance from hot appliances (e.g. fryers or ovens) must be at least 500 mm.

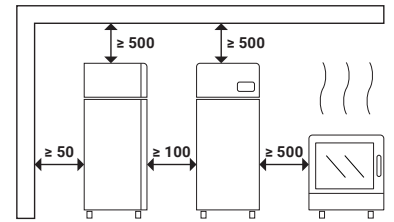

## EQUIPMENT AND FITTINGS

<b>Internal fittings</b>	AISI 304 stainless steel guides and racks - Adjustable and removable.
<b>Trays included</b>	N.3 - GN 2/1 - 650x530 - Plastic coated
<b>Maximum load per tray (kg)</b>	-
<b>Pairs of guides included</b>	N.3 "C" - GN 2/1 - 650x530
<b>Maximum setup capacity</b>	N.19 (step 70 mm) - GN 2/1 - 650x530
<b>Light under control panel</b>	Standard
<b>Wi-Fi kit</b>	Not available
<b>Bluetooth kit</b>	Not available
<b>Lock with key</b>	Not available
<b>Air distribution duct</b>	Not available
<b>Door opening pedal</b>	Optional
<b>Castors kit</b>	Optional
<b>Cable with Schuko or English plug</b>	Standard

## DIMENSIONS AND WEIGHTS

<b>Dimensions LxDxH (mm)</b>	720x805x2080-2130
<b>Package LxDxH (mm)</b>	760x860x2240
<b>Net weight (kg)</b>	111
<b>Gross weight (kg)</b>	125